

SEDIMENT TRAP

MANUFACTURED BY WIMCO, LLC. - SHAKOPEE, MN.,
ESS BROS. - CORCORAN, MN. OR APPROVED EQUAL

SPECIFICATIONS AND STANDARDS:

AISC MANUAL OF STEEL CONSTRUCTION, 9TH EDITION

AWS STRUCTURAL WELDING CODE - STEEL. D1.1-94

29 CRF 1926 - OSHA SAFETY AND HEALTH STANDARDS

DESIGN LOADS:


ALLOWABLE AXLE WEIGHT LOAD N/A

SAFETY FACTOR N/A

WATER FLOW RATE (THROUGH TYPE FF FILTER) 0.707 CFS @ 3" HEAD

MAXIMUM OVERFLOW RATE 5.94 CFS @ 15" HEAD

MODEL #CG 3067

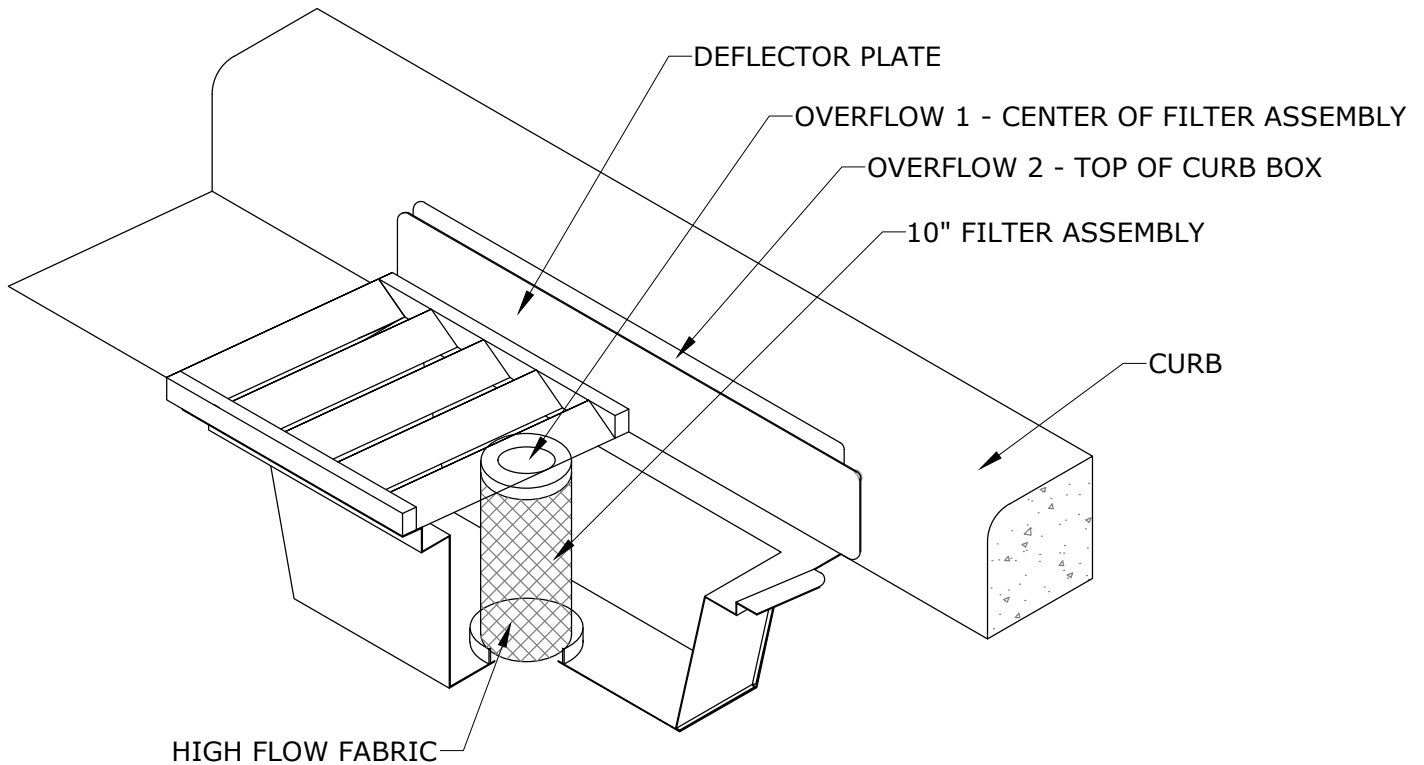

NOTES:

1. CLEAN FILTER MEDIA AFTER EACH RAIN EVENT AND REPLACE IF FILTER IS CLOGGED WITH SEDIMENT.
2. REMOVE DEBRIS/SEDIMENT FROM RECEPTACLE AFTER DEVICE IS 50% FULL.
3. ALTERNATIVE SEDIMENT TRAP DEVICES MUST BE APPROVED BY THE CITY ENGINEER PRIOR TO INSTALLATION.



CATCH BASIN SEDIMENT TRAP

REVISED: 2-24

ENGINEERING DEPARTMENT

PLATE NO.:

5302A