


PLAN

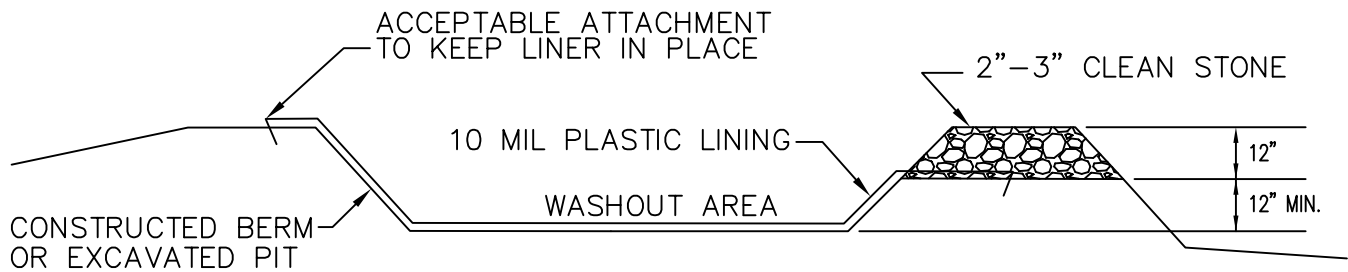

SECTION A-A

NOTES:

- 1) LOCATION OF THE WASHOUT AREA SHALL BE AT THE DISCRETION OF THE CONTRACTOR BUT IT MUST BE SHOWN ON THE PLANS AND MUST BE IDENTIFIED ON-SITE USING SIGNAGE. THE WASHOUT AREA SHALL BE AT LEAST THE MINIMUM DISTANCE FROM THE RIGHT OF WAY AS REQUIRED BY LOCAL JURISDICTION. THIS WASHOUT AREA SHALL BE LOCATED IN SUCH A MANNER SO THAT CONCRETE TRUCKS MAY PASS THROUGH THE WASHOUT AREA PRIOR TO THE STABILIZED ROCK CONSTRUCTION EXIT.
- 2) HARDENED MATERIAL SHALL BE BROKEN UP AND CLEANED OUT AS NEEDED TO MAINTAIN A FUNCTIONING WASHOUT AREA VOLUME OR AS DIRECTED BY THE ENGINEER.
- 3) THE WASHOUT AREA MUST BE GREATER THAN 50 FEET FROM ANY TREES.
- 4) THE WASHOUT AREA MUST BE SELF CONTAINED AND WATER TIGHT.



**CITY OF
CHANHASSEN**

CONCRETE
WASHOUT AREA

REVISED: 3-14

FILE NAME: G:\ENG\SPECS\5304

ENGINEERING DEPARTMENT

PLATE NO.:

5304