


CHANHASSEN FIRE DEPARTMENT POLICY REQUIREMENTS FOR FIRE LANE SIGNAGE

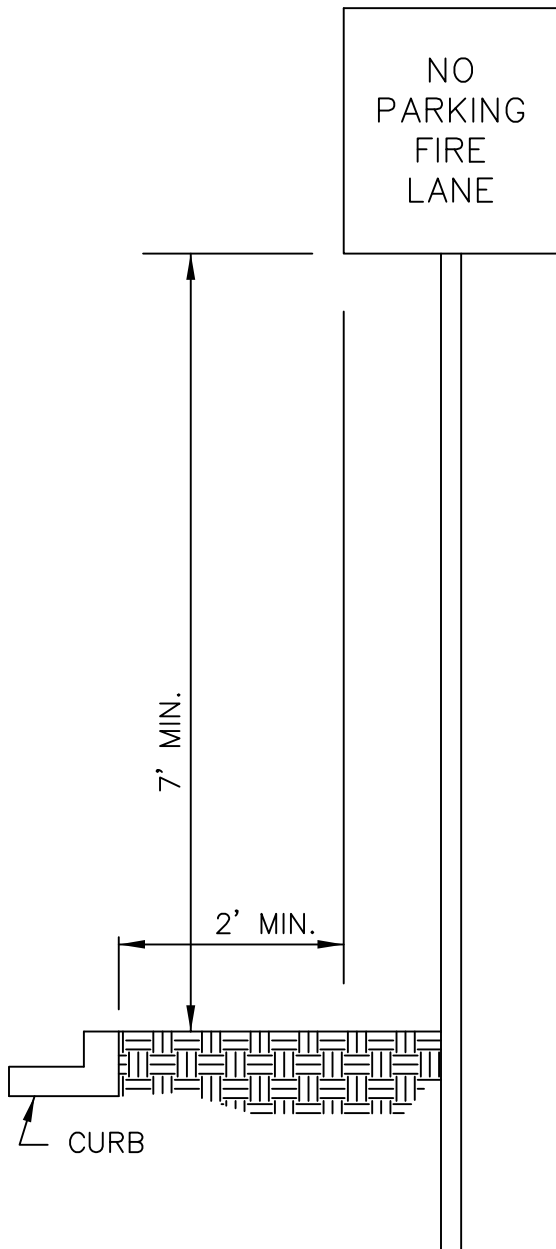

NOTES:

1. SIGNS TO BE A MINIMUM OF 12" X 18".
2. RED ON WHITE IS PREFERRED.
3. 3M OR EQUAL ENGINEER'S GRADE REFLECTIVE SHEETING ON ALUMINUM IS PREFERRED.
4. WORDING SHALL BE:

NO
PARKING
FIRE
LANE

5. SIGNS SHALL BE POSTED AT EACH END OF THE FIRE LANE AND AT LEAST AT EVERY 75' INTERVALS ALONG THE FIRE LANE.
6. ALL SIGNS SHALL BE DOUBLE SIDED FACING THE DIRECTION OF TRAVEL.
7. POST SHALL BE SET BACK A MINIMUM OF 24" BUT NOT MORE THAN 36" FROM THE BACK OF CURB.
8. A FIRE LANE SHALL BE REQUIRED IN FRONT OF FIRE DEPARTMENT CONNECTIONS EXTENDING 5' ON EACH SIDE AND ALONG ALL AREAS DESIGNATED BY THE FIRE CHIEF.

CHANHASSEN FIRE DEPARTMENT
FIRE PREVENTION POLICY 06-1991
DATED JANUARY 15, 1991

ANY DEVIATION FROM THE ABOVE PROCEDURES SHALL BE SUBMITTED IN WRITING, WITH A SITE PLAN, FOR APPROVAL BY THE FIRE CHIEF. IT IS THE INTENTION OF THE FIRE DEPARTMENT TO ENSURE CONTINUITY THROUGHOUT THE CITY BY PROVIDING THESE PROCEDURES FOR MARKING OF FIRE LANES.



CITY OF
CHANHASSEN

FIRE LANE
SIGNAGE

REVISED: 1-10

FILE NAME: G:\ENG\SPECS\5218

ENGINEERING DEPARTMENT

PLATE NO.:

5218