


PLAN VIEW



NOTE:

1. SOLVANT WELD ALL JOINTS ON CLEAN OUT. (NON-GASKETED)
2. CLEAN OUTS SHALL BE SPACED AT 200' INTERVALS (MAXIMUM)
3. BENDS AND RISER TO BE SAME SIZE AS DRAINTILE MAIN.
4. ALL DRAINTILES MUST HAVE TRACER WIRE AND GROUNDING ROD BROUGHT UP TO THE SURFACE INTO AN INTEGRATED CLEANOUT AND TRACER BOX AT EACH STRUCTURE OR AT CLEAN OUTS AS SHOWN ABOVE.
5. ONCE COMPLETED, THE CONTRACTOR WILL BE REQUIRED TO LOCATE THE RUNS VIA TRACER WIRE TESTING REQUIREMENTS.
6. INTEGRATED CLEANOUT & TRACER BOX SHALL BE THE BOABOX SEWER ACCESS POINT OR APPROVED EQUAL.
7. TRACER BOX TO BE LOCATED 2' BOC WHERE APPLICABLE.

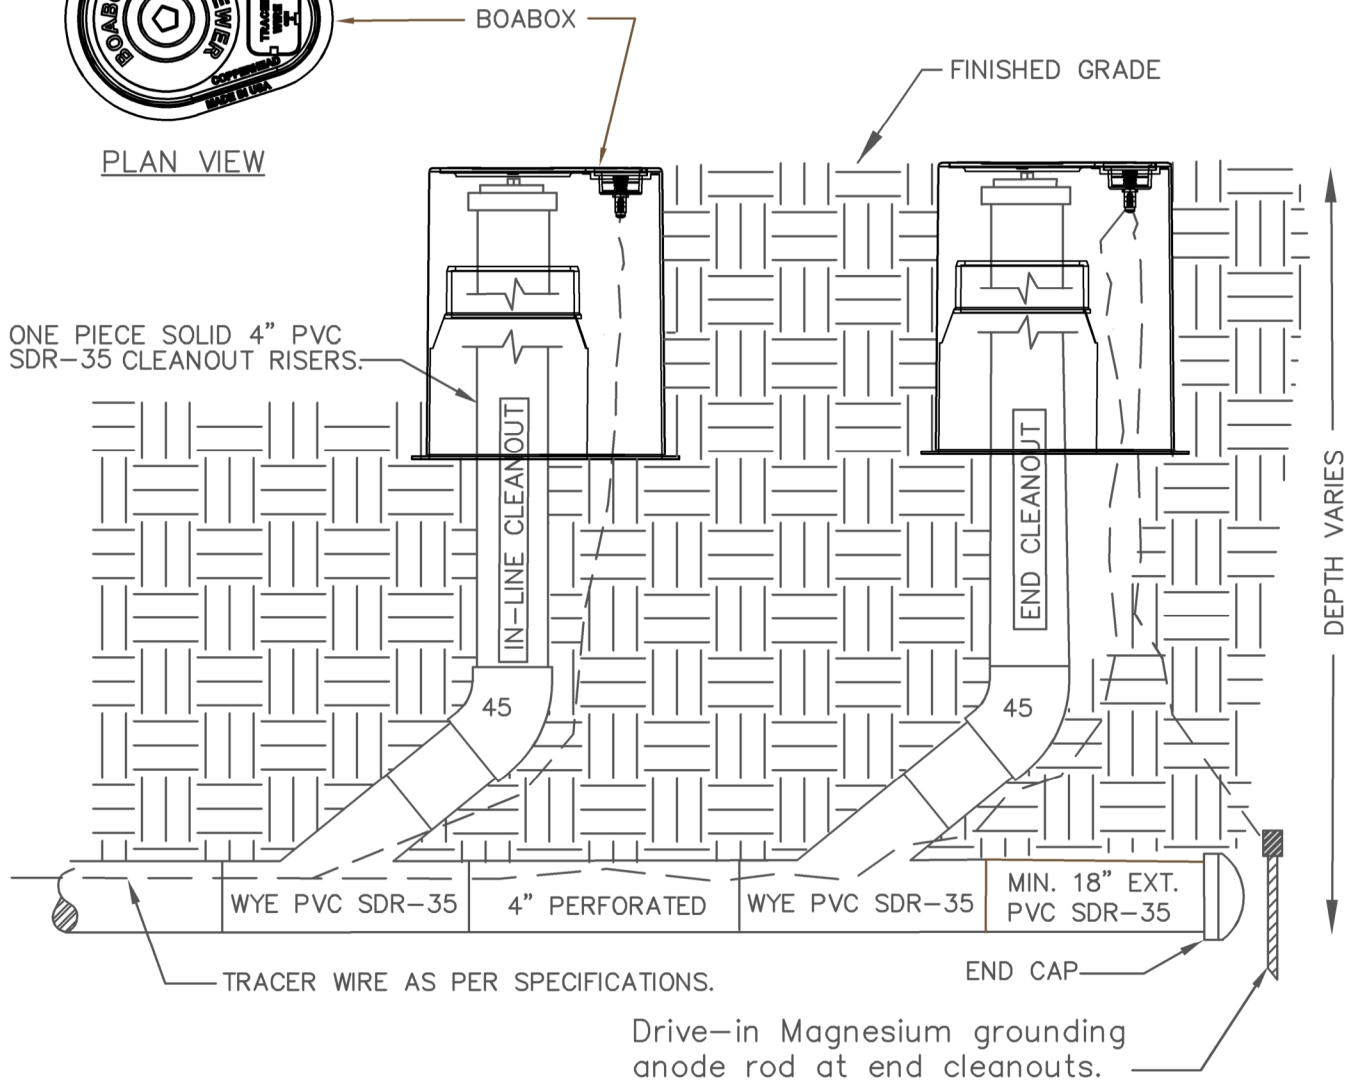

**CITY OF
CHANHASSEN**

SUB-SURFACE PVC DRAINTILE
CLEANOUTS FOR INLINE AND
END OF RUN CLEANOUTS

REVISED: 3-23

FILE NAME: G:\ENG\SPCS\5234

ENGINEERING DEPARTMENT

PLATE NO.:

5234