


NOTES:

1. FOR TIP OUT GUTTER, LIP ABOVE OF FACE OF GUTTER SHALL BE 0".
2. WHERE GUTTER IS ASSOCIATED WITH A CURB RAMP, THE TOLERANCE SHALL BE 0" - 1/4" FOR ADA COMPLIANCE.


**MNDOT B618
CONCRETE CURB AND GUTTER**

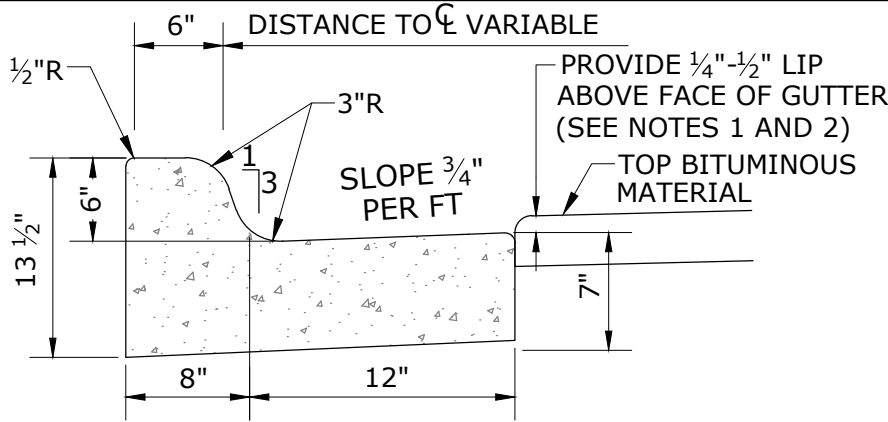

NOTES:

1. FOR TIP OUT GUTTER, LIP ABOVE OF FACE OF GUTTER SHALL BE 0".
2. WHERE GUTTER IS ASSOCIATED WITH A CURB RAMP, THE TOLERANCE SHALL BE 0" - 1/4" FOR ADA COMPLIANCE.
3. B612 FOR USE ONLY WITH PRIVATE DRIVEWAYS, PARKING LOTS, OR MEDIANS.


**MNDOT B612
CONCRETE CURB AND GUTTER**

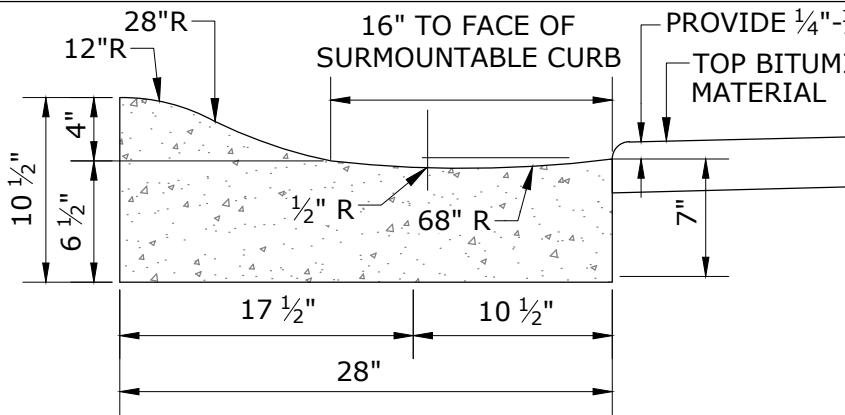

NOTES:

1. FOR TIP OUT GUTTER, LIP ABOVE OF FACE OF GUTTER SHALL BE 0".
2. WHERE GUTTER IS ASSOCIATED WITH A CURB RAMP, THE TOLERANCE SHALL BE 0" - 1/4" FOR ADA COMPLIANCE.

**SURMOUNTABLE
CONCRETE CURB AND GUTTER**

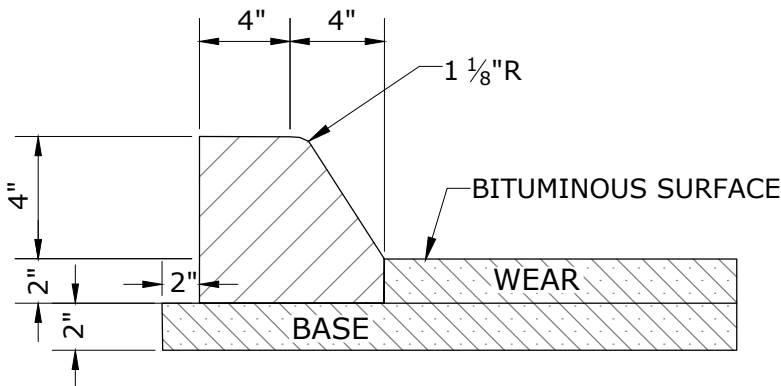

NOTES:

1. TACK ALL BITUMINOUS OR CONCRETE PLACEMENT SURFACES BEFORE PAVING BITUMINOUS CURBS.

**BITUMINOUS CURB
4" SHOE FORMED**



TYPICAL CURB AND GUTTER

REVISED: 2-24

ENGINEERING DEPARTMENT

PLATE NO.:

5203