



BUILDING INSPECTION DIVISION





7700 Market Boulevard, P.O. Box 147
Chanhassen, Minnesota 55317
Phone: 952-227-1180 | Fax: (952) 227-1190

WINDOWS SAFETY GLAZING


This handout is intended only as a guide and is based partly on the 2020 Minnesota State Building Code, City of Chanhassen ordinances, and good building practices. While every attempt has been made to ensure the correctness of this handout, no guarantees are made to its accuracy or completeness. Responsibility for compliance with applicable codes and ordinances falls on the permit applicant.

For questions regarding code requirements, refer to the applicable codes or contact your local Building Department.


LABEL EXAMPLES

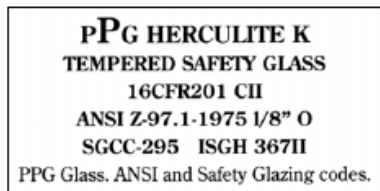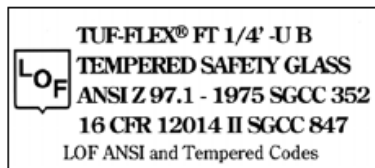




IDENTIFICATION OF SAFETY GLAZING

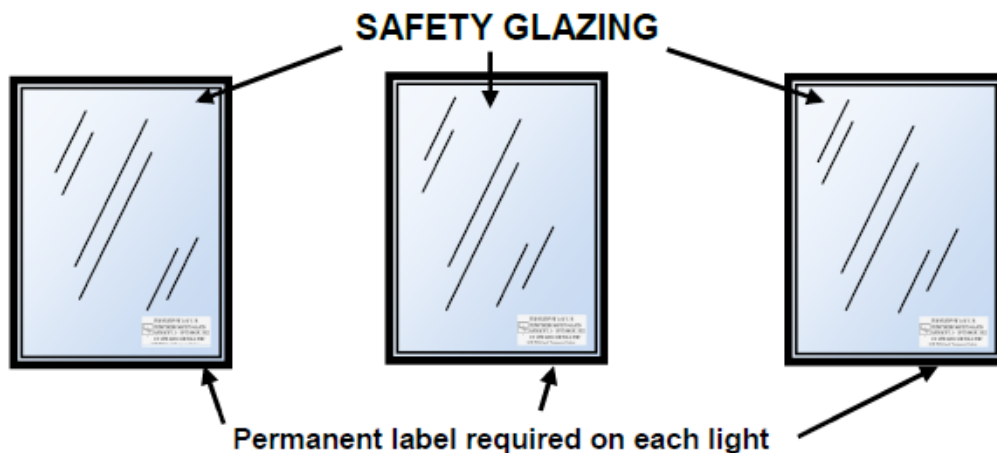


SAFETY GLAZING IN DOORS REQUIRED IN ALL LOCATIONS SHOWN

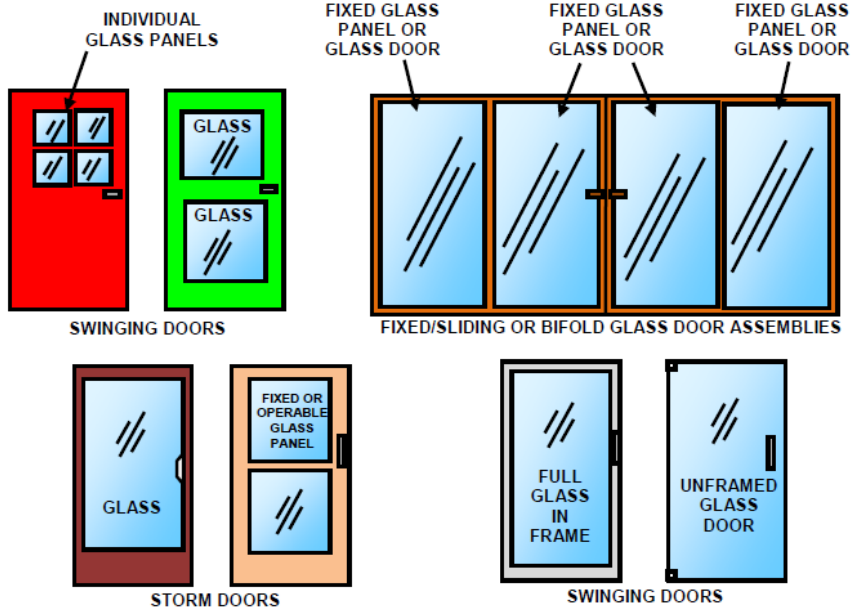



SAFETY GLAZING ADJACENT DOORS

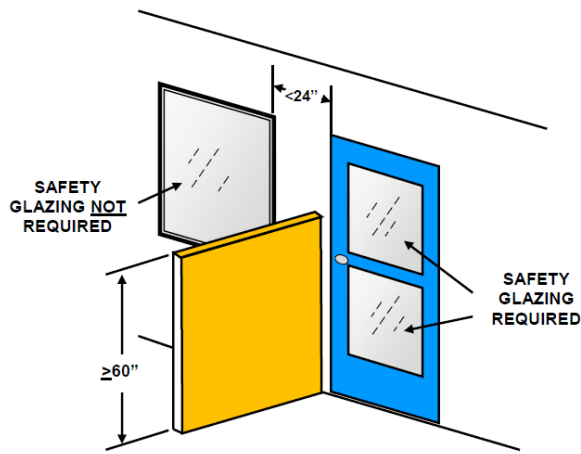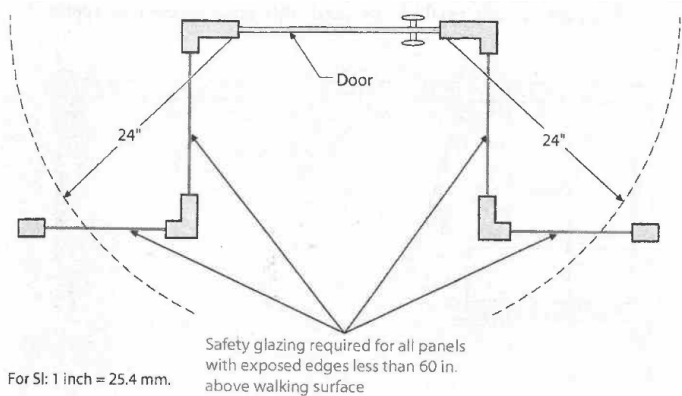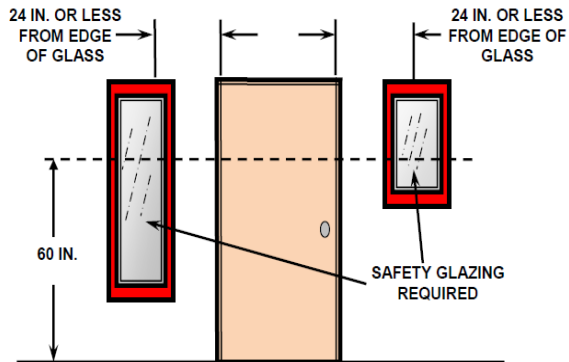


SAFETY GLAZING IS NOT REQUIRED ADJACENT A DOOR IF THERE IS A WALL OR PANEL AT LEAST 60 INCHES IN HEIGHT SEPARATING THE DOOR FROM THE GLAZING

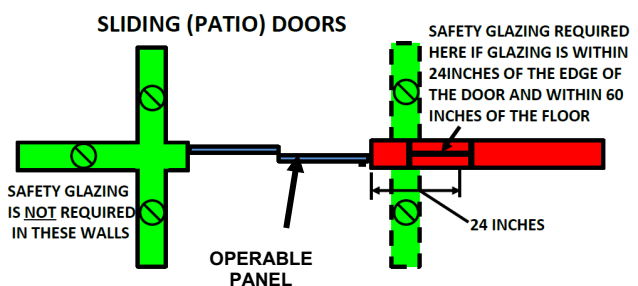

SAFETY GLAZING ADJACENT A BATH TUB OR IN TUB OR SHOWER ENCLOSURES

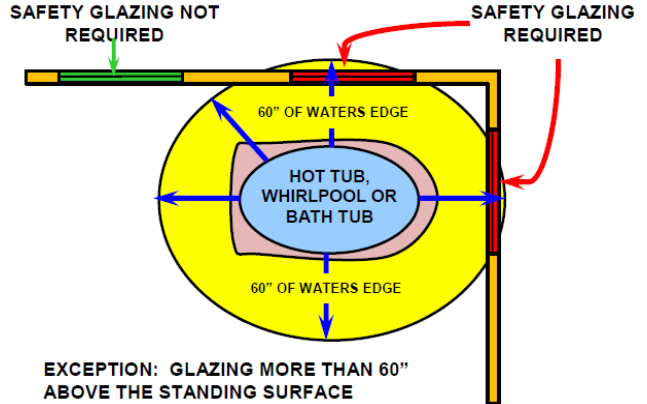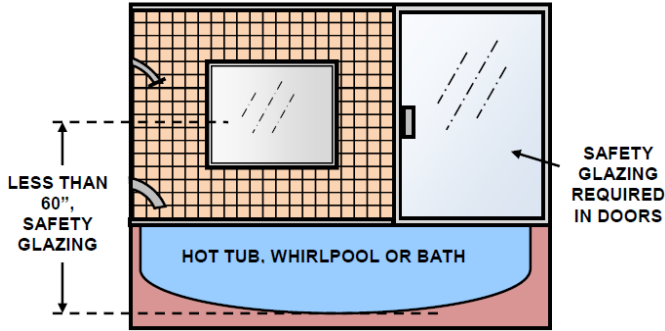


SAFETY GLAZING REQUIRED ADJACENT SWIMMING POOLS

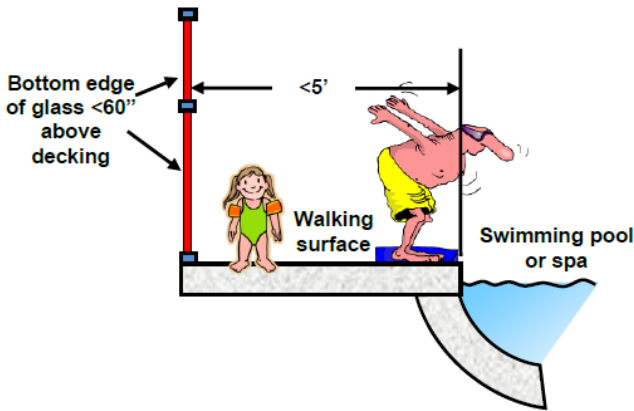


SAFETY GLAZING IN WINDOWS

SAFETY GLAZING REQUIRED IF ALL FOUR CRITERIA EXIST

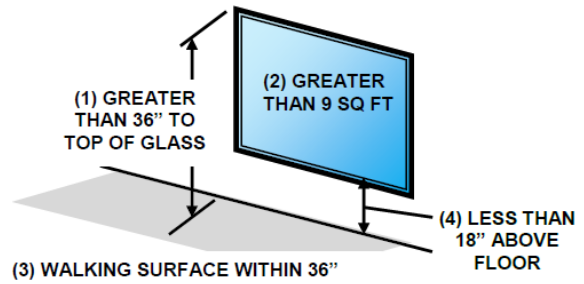

IF THE WINDOW HAS A BAR OR RAIL MOUNTED 34-38" ABOVE THE PLANE OF THE WALKING SURFACE, SAFETY GLAZING IS NOT REQUIRED. THE BAR OR RAIL MUST BE AT LEAST 1 1/2" THICK AND NOT CONTACT THE GLASS.

SAFETY GLAZING FOR STAIRS AND LANDINGS

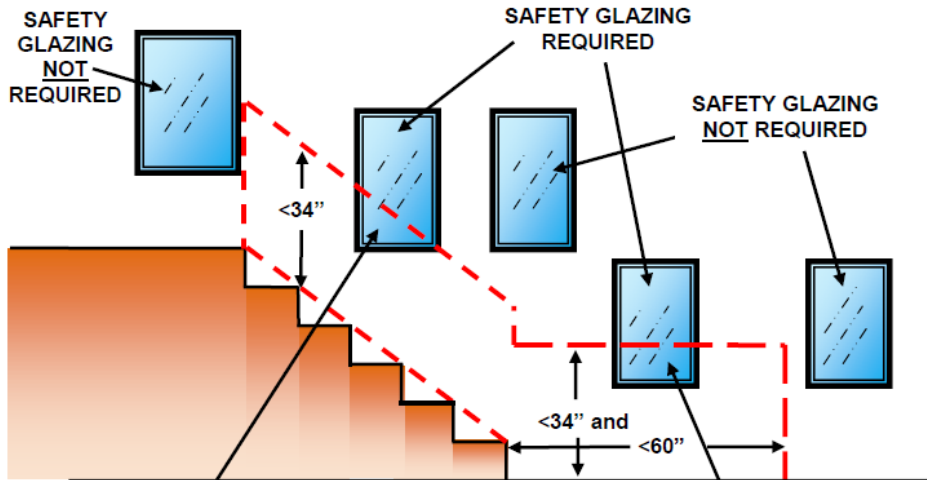

IF THE WINDOW HAS A BAR OR RAIL MOUNTED 34-38" ABOVE THE NOSING OF THE TREADS, SAFETY GLAZING IS NOT REQUIRED. THE BAR OR RAIL MUST BE AT LEAST 1 1/2" THICK AND NOT CONTACT THE GLASS.

IF THE WINDOW HAS A GUARD AT LEAST 36 INCHES IN HEIGHT AND THE GLASS IS AT LEAST 18 INCHES FROM THE GUARD, SAFETY GLAZING IS NOT REQUIRED.