


SECTION A-A  
No Scale

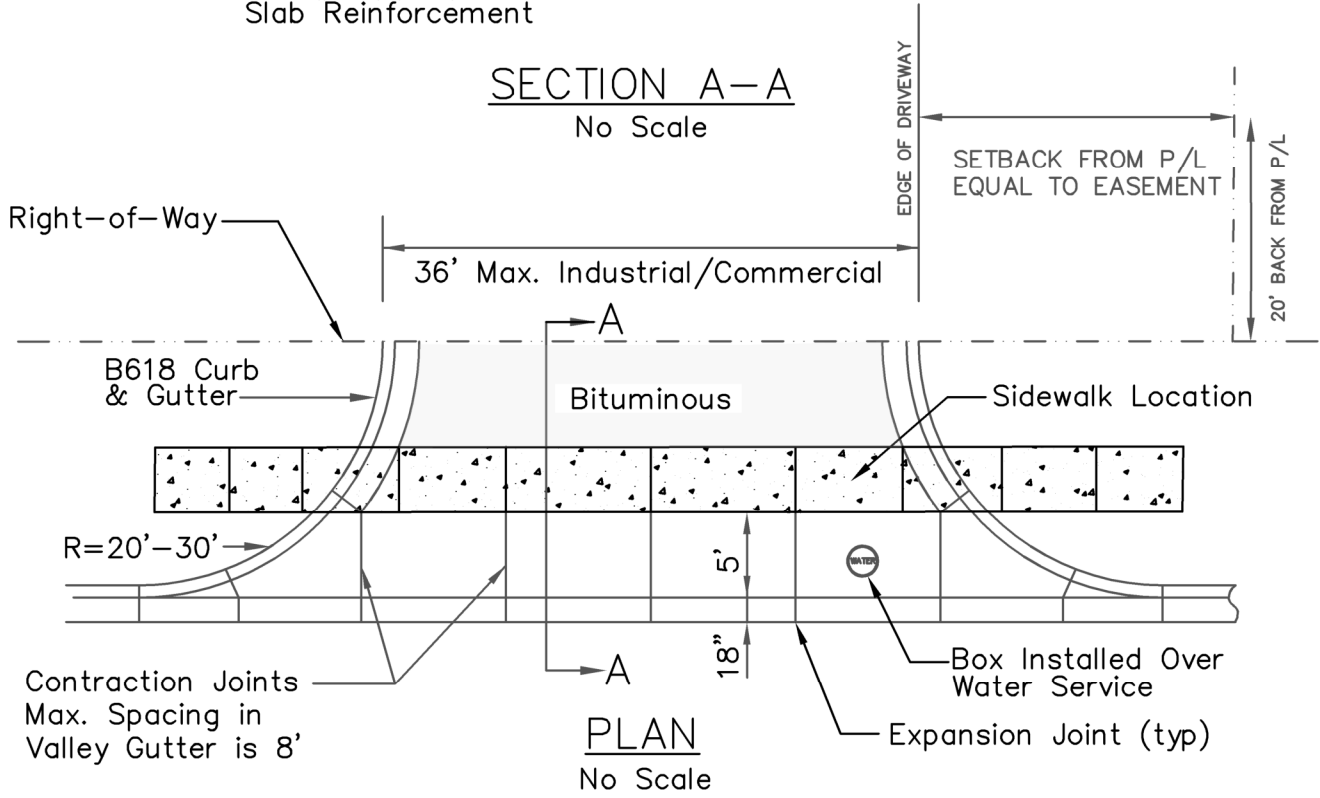

PLAN  
No Scale

**NOTE:**

1. Use #4 (1/2") rebar slab reinforcement in R.O.W placed @ 6" in from each edge. Rebar is to be spaced 2' on centers, being 6" on center in the gutter.
2. Contraction joints shall be 1/3 the depth of the slab.
3. Maximum pavement slope allowed within 30' of the street is 4.5%.
4. All concrete mixes shall be as shown in Chanhassen Street Construction Specification under section 4.05.
5. If the water shutoff is located in the driveway pavement a cover as manufactured by McDonald 74M1A series with an 8" frame & cover or equal shall be installed.
6. MnDot B618 or B612 curbs must be poured monolithically with driveways,
7. Sidewalks shall take grade precedence through driveways.



**CITY OF  
CHANHASSEN**

COMMERCIAL/INDUSTRIAL  
CONCRETE DRIVEWAY APRON

REVISED: 2-22

FILE NAME: G:\ENG\SPECS\5207

ENGINEERING DEPARTMENT

PLATE NO.:

5207